


Balancing of Capture Jet[®] Hoods

Exhaust Airflow (CFM) vs. Pressure Differential (inches H₂O)


Model KVM Hybrid

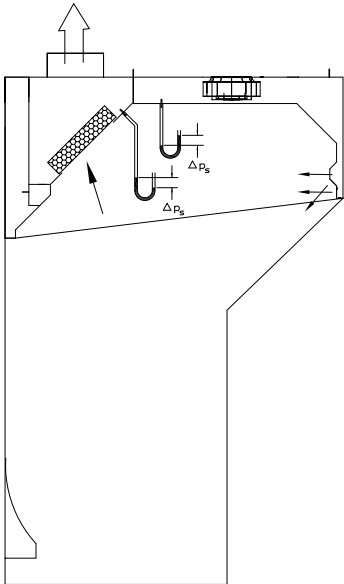


The capture jet and exhaust air flows are easily and accurately determined by measuring the pressure difference from the T.A.B. ports mounted in each plenum. Corresponding air flows can be read from the diagrams provided.

All T.A.B. readings assume cold conditions. To adjust for an exhaust temperature of 110 °F, multiply the readings by a factor of 0.93.


KVM - 2 Filters

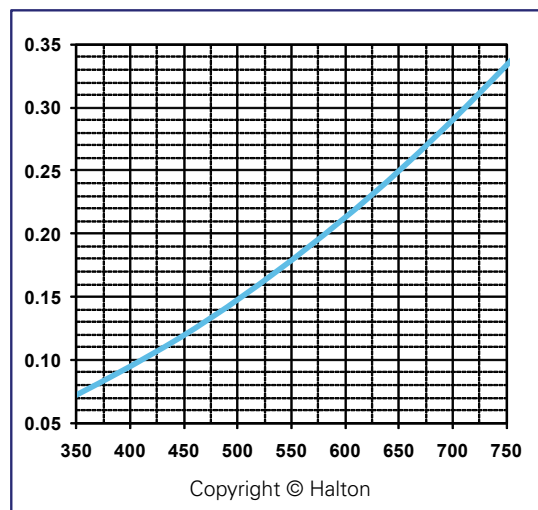

KVM - 2.5 Filters

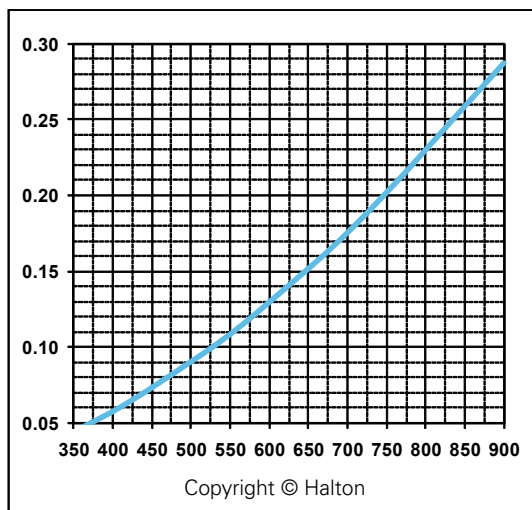


KVM - 3 Filters

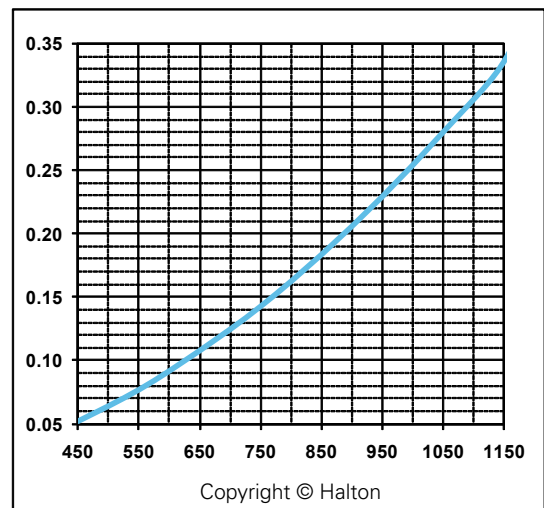


Model KVM Hybrid


KVM - 3.5 Filters

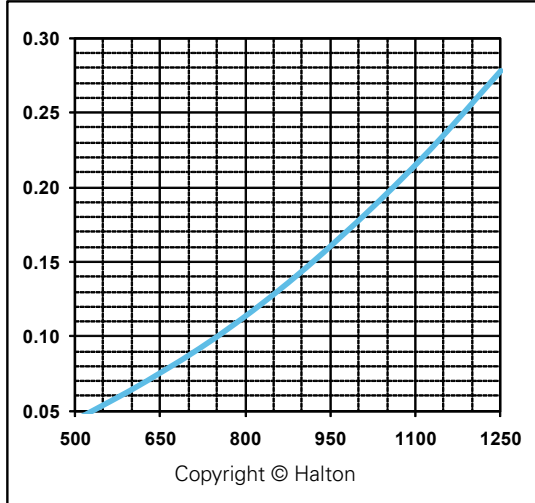


KVM - 4 Filters

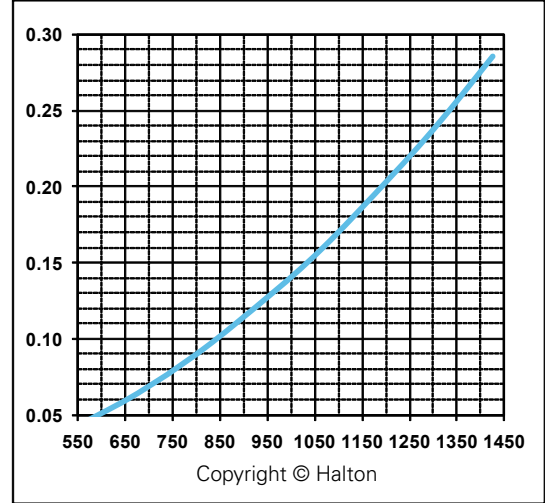


KVM - 4.5 Filters

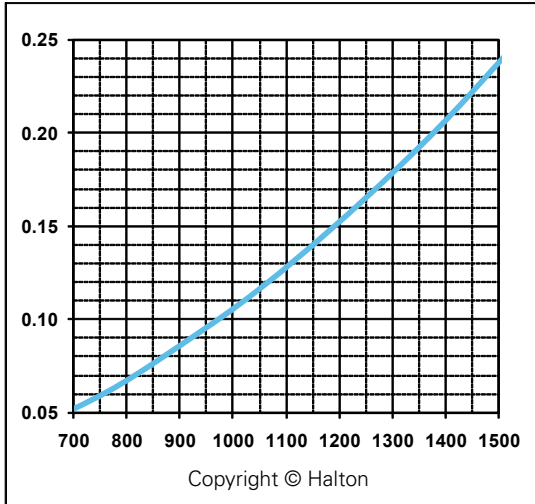


KVM - 5 Filters

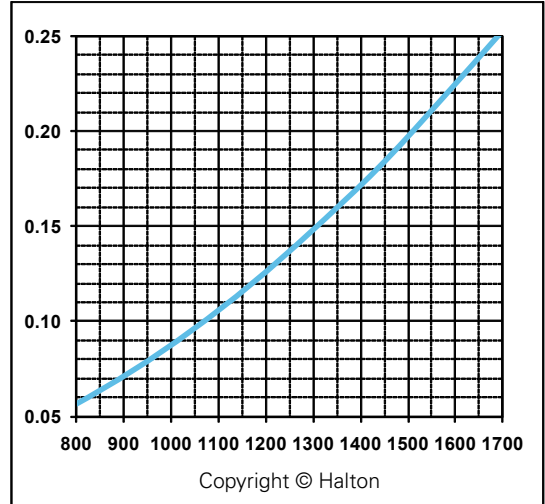

KVM - 5.5 Filters

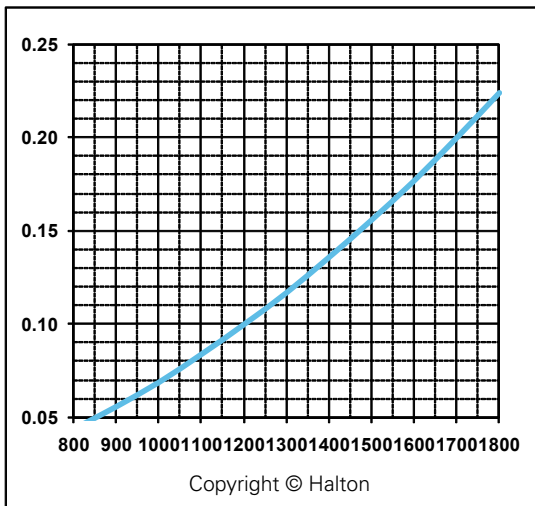


KVM - 6 Filters

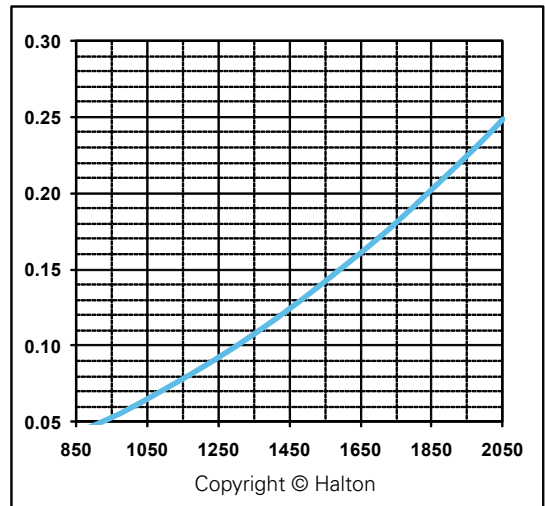


Model KVM Hybrid


KVM - 6.5 Filters

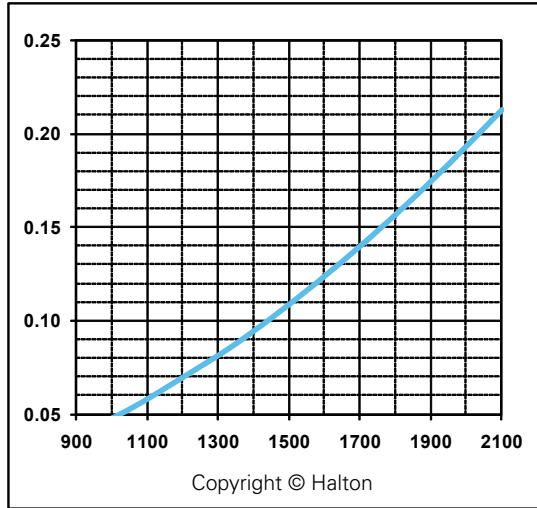

KVM - 7 Filters

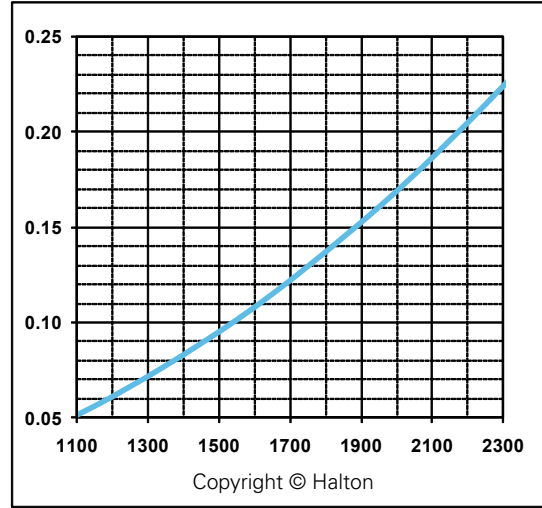

KVM - 7.5 Filters

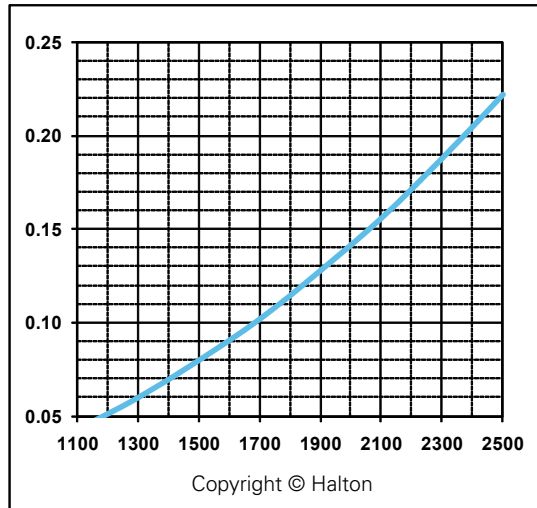

KVM - 8 Filters

