


Balancing of Capture Jet[®] Hoods

Exhaust Airflow (CFM) vs. Pressure Differential (inches H₂O)


Models KVW/KVO/KVR

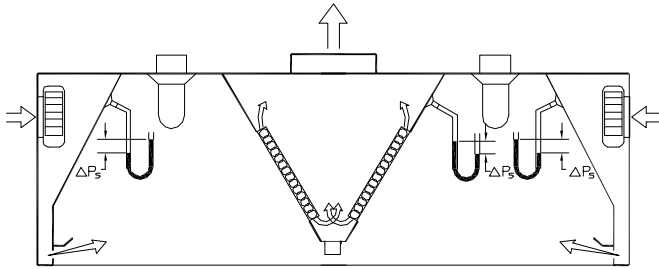


The capture jet and exhaust air flows are easily and accurately determined by measuring the pressure difference from the T.A.B. ports mounted in each plenum. Corresponding air flows can be read from the diagrams provided.

All T.A.B. readings assume cold conditions. To adjust for an exhaust temperature of 110 °F, multiply the readings by a factor of 0.93.


KVW/KVO/KVR - 2 Filters Per Side

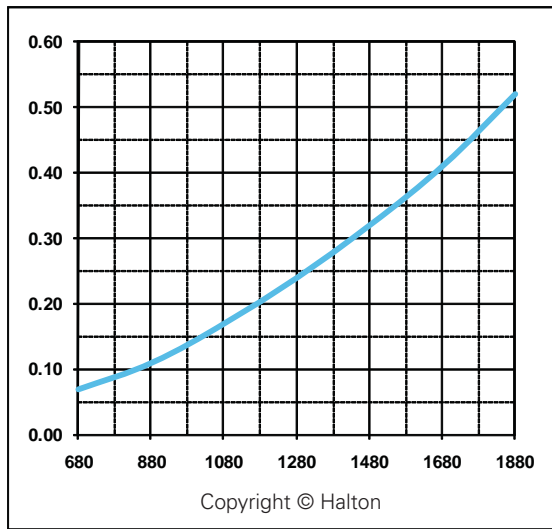


KVW/KVO/KVR - 2.5 Filters Per Side

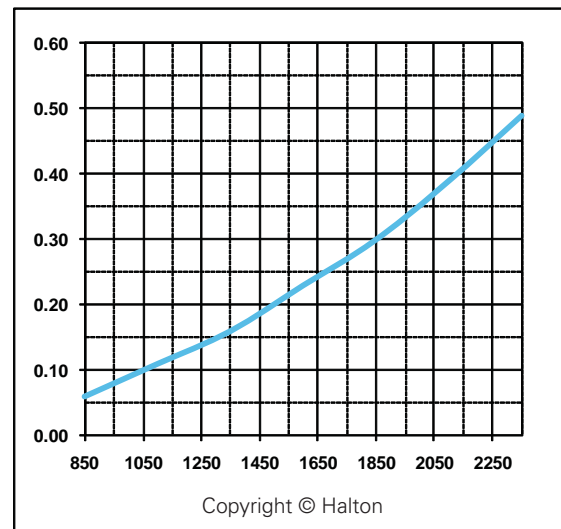

KVW/KVO/KVR - 3 Filters Per Side

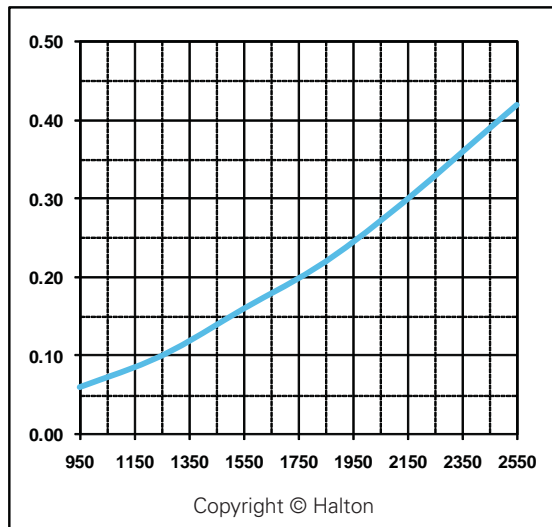


KVW/KVO/KVR - 3.5 Filters Per Side

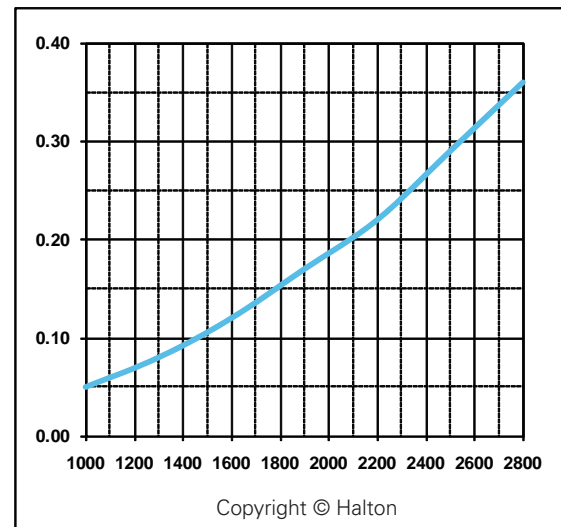


Models KVV/KVO/KVR


KVV/KVO/KVR - 4 Filters Per Side

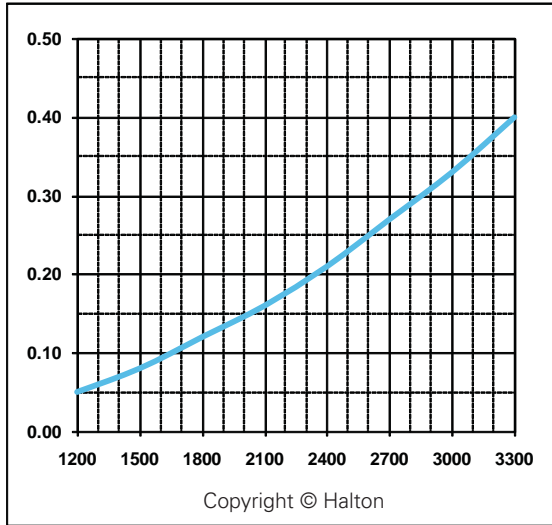


KVV/KVO/KVR - 4.5 Filters Per Side

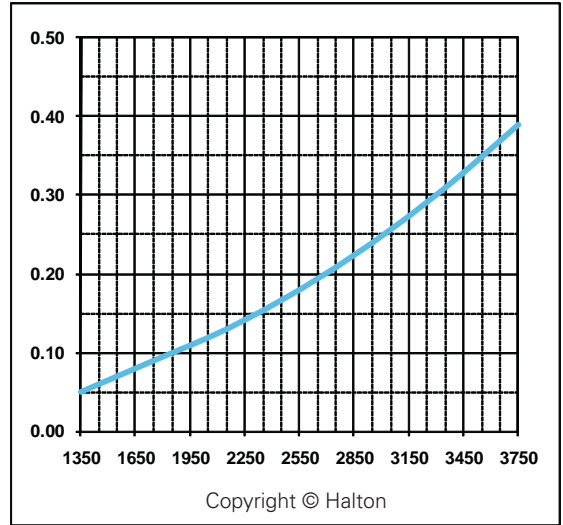


KVV/KVO/KVR - 5 Filters Per Side

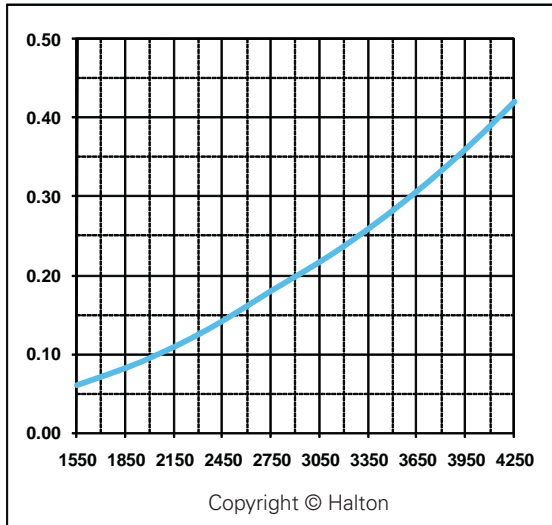


KVV/KVO/KVR - 5.5 Filters Per Side

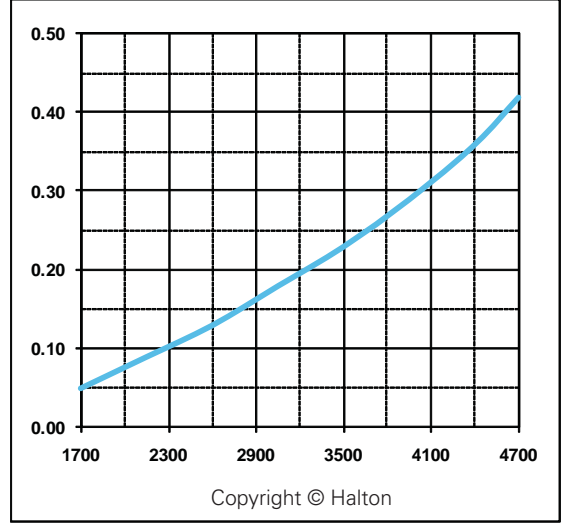

KVV/KVO/KVR - 6 Filters Per Side

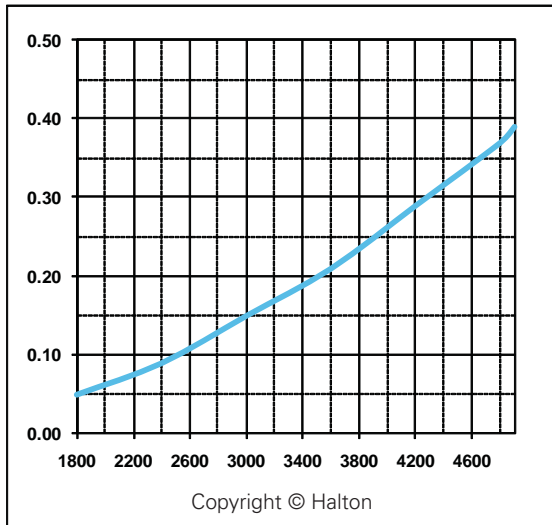


KVV/KVO/KVR - 6.5 Filters Per Side

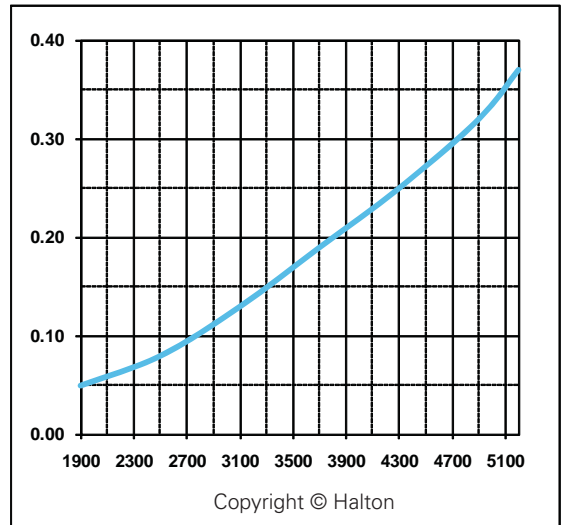


Models KVW/KVO/KVR

KVW/KVO/KVR - 7 Filters Per Side

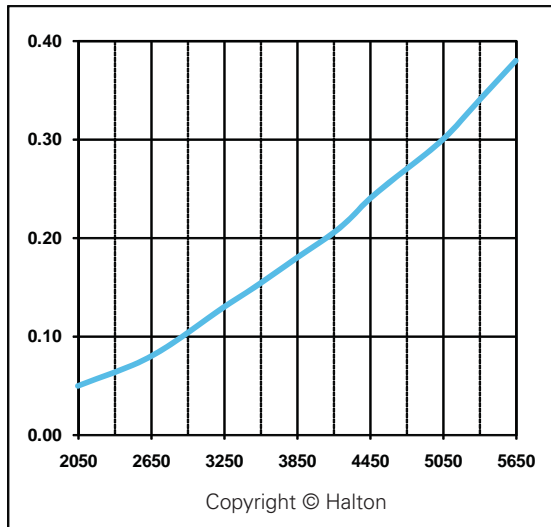

KVW/KVO/KVR - 7.5 Filters Per Side

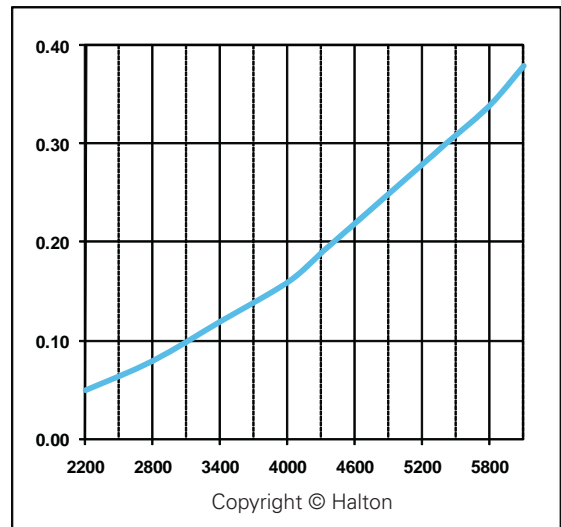

KVW/KVO/KVR - 8 Filters Per Side

